




**FLEXIBLE  
BALING  
SOLUTIONS  
FOR YOUR  
BUSINESS  
NEEDS**

**BALER MODEL  
16-16 E2RRB**

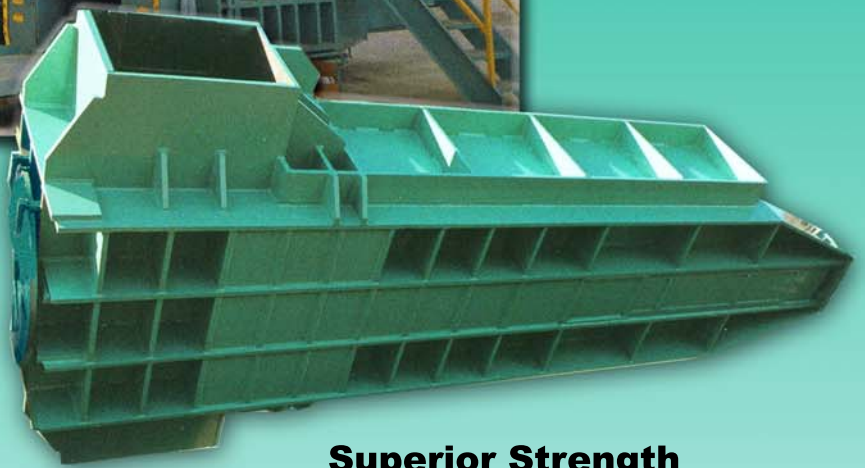

**Superior Strength  
Extra Heavy Duty Construction**



*Five Star Design, Performance and Reliability*



**Western Baler & Conveyor**

**[www.wbccompany.com](http://www.wbccompany.com)**

**[morgan@wbccompany.com](mailto:morgan@wbccompany.com)**

1007 Nichols Drive, Rocklin CA 95765

Tel: 916-408-6996 Fax: 916-408-6969

***ENTERPRISE BALER***



**[www.enterprisebaler.com](http://www.enterprisebaler.com)**

**[info@enterprisebaler.com](mailto:info@enterprisebaler.com)**

2624 Rousselle St. Santa Ana CA 92707

Tel: 714-835-0551 Fax: 714-754-4021

## GENERAL DESCRIPTION

Metric Specification = ( )

Length Overall (pump unit on side)	34'7"	(1054 cm)								
Width Overall (pump unit not incld.)	17'3"	(526 cm)								
Height at Control Station	8'0"	(244 cm)								
Height at Loading Hopper	8'4"	(254 cm)								
Charging Chamber	28"D x 60"W x 110"L	(71 cm x 152 cm x 280 cm)								
Loading Chute Opening	72" x 132"	(183 cm x 335 cm)								
Gross Weight w/o Pump Unit	89,000 lbs	(40,370 Kg)								
Gross Weight w/ Pump Unit	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>150 HP =</td> <td>97,600 lbs (44,365 Kg)</td> </tr> <tr> <td>200 HP =</td> <td>103,000 lbs (46,820 Kg)</td> </tr> <tr> <td>250 HP =</td> <td>105,000 lbs (47,730 Kg)</td> </tr> <tr> <td>300 HP =</td> <td>107,000 lbs (48,635 Kg)</td> </tr> </table>		150 HP =	97,600 lbs (44,365 Kg)	200 HP =	103,000 lbs (46,820 Kg)	250 HP =	105,000 lbs (47,730 Kg)	300 HP =	107,000 lbs (48,635 Kg)
150 HP =	97,600 lbs (44,365 Kg)									
200 HP =	103,000 lbs (46,820 Kg)									
250 HP =	105,000 lbs (47,730 Kg)									
300 HP =	107,000 lbs (48,635 Kg)									

Bale - Finish Size (approx.) 31" x 45" x 62"  
(79 cm x 114 cm x 158 cm)

## HYDRAULIC SPECIFICATIONS

Operating Hydraulic Pressure up to 3,500 PSI (max)

Gathering/Baling Ram Cyl Bore	16"	(40.64 cm)
Gathering/Baling Ram Force (face)	426 PSI	(2,940 kPa)
Total Gathering Ram Force	351 Tons	(3,129 kN)
Bale Ejector Cylinder Bore	16"	(40.64 cm)
Bale Ejector Ram Force (face)	664 PSI	(4,578 kPa)
Total Bale Ejector Ram Force	351 Tons	(3,129 kN)

## FEATURES Specifications Subject to Change Without Notice

- A** Gathering/Baling Ram
- B** 16" Bale Ejection Ram (Standard)
- C** Pumping Unit (air/oil heat exchanger - standard)
 

Reservoir	150 HP =	900 (3,400 L)
Oil Capacity	200 HP =	1,200 (4,540 L)
U.S. Gallon (liter)	250 HP =	1,400 (5,300 L)
	300 HP =	1,800 (6,815 L)
- D** Electrical Voltage  
460V - 3 Phase - 60Hz (standard)  
(specials on request)
- E** Automatic Wire Tyer
- F** Main Power Panel
- G** Enlarged Baler Loading Hopper
- H** Shear Knives
- I** Operators Control Panel - standard location  
(optional locations available)
- J** Programmable Processor Controller
- L** Options - Bale Separation Door

MATERIAL		BALE DENSITY LB/CU/FT (Kg/M <sup>3</sup> )	BALE WEIGHT LBS (Kg)	WIRES PER BALE*	PRODUCTION RATE - TONS PER HOUR US STD. (METRIC)			
					150 HP	200 HP	250 HP	300 HP
Fiber	OCC	up to <b>34</b> (up to 545)	up to <b>1,700</b> (up to 771)	<b>6</b>	up to <b>20</b> (up to 18)	up to <b>25</b> (up to 23)	up to <b>30</b> (up to 27)	up to <b>37</b> (up to 33)
	Hi Grades	up to <b>35</b> (up to 560)	up to <b>1,800</b> (up to 817)	<b>6</b>	up to <b>22</b> (up to 20)	up to <b>29</b> (up to 27)	up to <b>37</b> (up to 33)	up to <b>46</b> (up to 42)
	News/Mix	up to <b>33</b> (up to 528)	up to <b>1,900</b> (up to 861)	<b>6</b>	up to <b>27</b> (up to 25)	up to <b>35</b> (up to 32)	up to <b>46</b> (up to 41)	up to <b>47</b> (up to 43)
Ferrous Metals	Tin Cans	up to <b>34</b> (up to 545)	up to <b>1,700</b> (up to 771)	<b>5</b>	up to <b>9</b> (up to 8)	up to <b>10</b> (up to 9)	up to <b>14</b> (up to 13)	up to <b>15</b> (up to 14)
	Tin Siding	up to <b>84</b> (up to 1,345)	up to <b>4,500</b> (up to 2,041)	<b>4</b>				
Non-Ferrous Metals	Alum. Can	up to <b>25</b> (up to 400)	up to <b>1,500</b> (up to 681)	<b>5</b>	up to <b>9</b> (up to 6)	up to <b>10</b> (up to 9)	up to <b>11</b> (up to 10)	up to <b>14</b> (up to 13)
	Alum. Siding	up to <b>62</b> (up to 995)	up to <b>3,300</b> (up to 1,500)	<b>5</b>	up to <b>8</b> (up to 7)	up to <b>10</b> (up to 9)	up to <b>13</b> (up to 12)	up to <b>15</b> (up to 14)
	Alum. Insul. Wire	up to <b>52</b> (up to 835)	up to <b>2,800</b> (up to 1,272)	<b>7</b>	up to <b>8</b> (up to 7)	up to <b>11</b> (up to 10)	up to <b>14</b> (up to 13)	up to <b>15</b> (up to 14)
	Copper Tube	up to <b>64</b> (up to 1,025)	up to <b>3,400</b> (up to 1,543)	<b>7</b>	up to <b>14</b> (up to 13)	up to <b>17</b> (up to 15)	up to <b>23</b> (up to 22)	up to <b>29</b> (up to 26)
	Copper Insul. Wire	up to <b>84</b> (up to 1,345)	up to <b>4,600</b> (up to 2,087)	<b>7</b>	up to <b>19</b> (up to 17)	up to <b>25</b> (up to 23)	up to <b>33</b> (up to 29)	up to <b>42</b> (up to 38)
	Copper Wire Strip	up to <b>182</b> (up to 2,921)	up to <b>9,300</b> (up to 4,226)	<b>6</b>	up to <b>36</b> (up to 33)	up to <b>43</b> (up to 39)	up to <b>51</b> (up to 46)	up to <b>51</b> (up to 46)
	Stainless Sheet	up to <b>102</b> (up to 1,637)	up to <b>5,300</b> (up to 2,409)	<b>6</b>	up to <b>15</b> (up to 14)	up to <b>17</b> (up to 15)	up to <b>24</b> (up to 22)	up to <b>26</b> (up to 24)
	Stainless Mix Pkg.	up to <b>82</b> (up to 1,316)	up to <b>4,300</b> (up to 1,954)	<b>5-7</b>	up to <b>13</b> (up to 12)	up to <b>16</b> (up to 15)	up to <b>21</b> (up to 19)	up to <b>24</b> (up to 22)
Plastic	Film	up to <b>29</b> (up to 465)	up to <b>1,600</b> (up to 727)	<b>10-15</b>				
	HDPE	up to <b>31</b> (up to 497)	up to <b>1,700</b> (up to 771)	<b>10-15</b>	up to <b>13</b> (up to 12)	up to <b>15</b> (up to 13)	up to <b>17</b> (up to 15)	up to <b>19</b> (up to 17)
	PETE	up to <b>29</b> (up to 465)	up to <b>1,700</b> (up to 727)	<b>10-15</b>	up to <b>13</b> (up to 12)	up to <b>15</b> (up to 13)	up to <b>17</b> (up to 15)	up to <b>19</b> (up to 17)
Solid Waste		up to <b>50</b> (up to 801)	up to <b>2,500</b> (up to 1,134)	<b>6-7</b>	up to <b>28</b> (up to 26)	up to <b>36</b> (up to 33)	up to <b>47</b> (up to 42)	up to <b>47</b> (up to 43)

\*Based on 11 ga. Super Hi Tensile Wire - each wire 13'-3" lg approx. (0.5 lb each wire)